

POINT MICROMETERS




- Measure the web thickness of drills, small grooves and keyways
- Graduation 0.01mm
- Ratchet stop
- Carbide tips
- Supplied with setting standards (except 0-25mm)



3230-25A

(mm)

| Code | Range | Type | Accuracy | L | b |
|------------|----------|------|----------|-------|------|
| 3230-25A | 0-25mm | A | 4μm | 57 | 32 |
| 3230-50A | 25-50mm | A | 4μm | 82 | 44.5 |
| 3230-75A | 50-75mm | A | 5μm | 107 | 57 |
| 3230-100A | 75-100mm | A | 5μm | 132.6 | 69.5 |
| 3230-25BA | 0-25mm | B | 4μm | 57 | 32 |
| 3230-50BA | 25-50mm | B | 4μm | 82 | 44.5 |
| 3230-75BA | 50-75mm | B | 5μm | 107 | 57 |
| 3230-100BA | 75-100mm | B | 5μm | 132.6 | 69.5 |

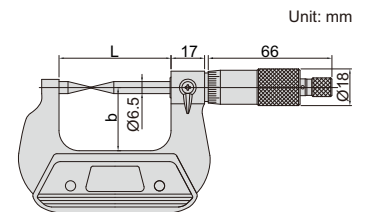

DATA
OUTPUT

IP65
WATERPROOF

DIGITAL POINT MICROMETERS




- Measure the web thickness of drills, small grooves and keyways
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- Automatic power off
- Ratchet stop
- Carbide tips
- Supplied with setting standards (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-30, 7302-30)



3530-25A

(mm)

| Code | Range | Type | Accuracy | L | b |
|------------|---------------|------|----------|-------|------|
| 3530-25A | 0-25mm/0-1" | A | ±4μm | 57 | 32 |
| 3530-50A | 25-50mm/1-2" | A | ±4μm | 82 | 44.5 |
| 3530-75A | 50-75mm/2-3" | A | ±5μm | 107 | 57 |
| 3530-100A | 75-100mm/3-4" | A | ±5μm | 132.6 | 69.5 |
| 3530-25BA | 0-25mm/0-1" | B | ±4μm | 57 | 32 |
| 3530-50BA | 25-50mm/1-2" | B | ±4μm | 82 | 44.5 |
| 3530-75BA | 50-75mm/2-3" | B | ±5μm | 107 | 57 |
| 3530-100BA | 75-100mm/3-4" | B | ±5μm | 132.6 | 69.5 |

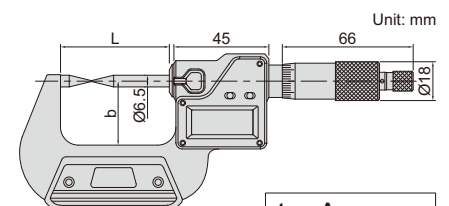



HIGH PRECISION DIGITAL POINT MICROMETERS/SNAP GAGES



ABSOLUTE ENCODER, THE ORIGINAL DATA REMAINS AFTER POWER OFF

ONE TURN OF SLEEVE MAKES 5MM SPINDLE FEED, PRESS THE FORK, THE SPINDLE RETRACTS 3MM

IP65
WATERPROOF

MEASUREMENT ACCURACY IS NOT AFFECTED BY THE USE OF SLEEVE

NON-ROTATING SPINDLE


ATTENTION: RECHARGEABLE BATTERY, FOR 24 HOURS CONTINUOUS WORKING

DATA OUTPUT



3354-25

- Measure the web thickness of drills, small grooves and keyways
- Absolute encoder, the original data remains after power off
- Adjustable resolution: 0.0002mm/0.00001"
0.001mm/0.00005"
0.01mm/0.0005"
- One turn of sleeve makes 5mm spindle feed
- Measurement accuracy is not affected by the use of sleeve
- Press the fork, the spindle retracts 3mm
- Linear ball bearings for ten million times use
- Carbide spindle and anvil
- Measuring force 7-10N
Customizable measuring force range 2-12N
Attention: small measuring force will reduce the dustproof and waterproof level
- Button function: data output, tolerance, data preset, data hold, measuring direction change, max./min./TIR, power off time, on/off, zero, mm/inch, adjust resolution
- Supplied with gage blocks for zero setting (except 0-25mm/0-1")
- Power: rechargeable battery, for 24 hours continuous working

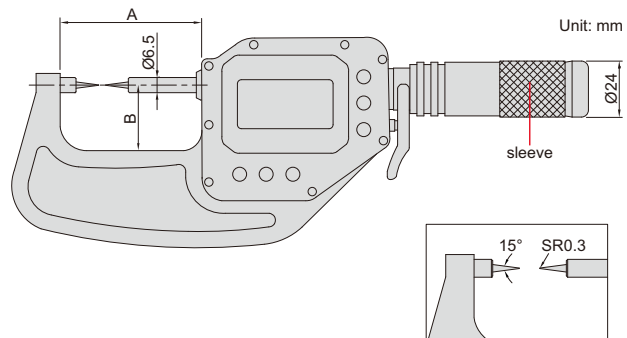

With data interface

Optional accessory:

wireless transmitter, code 7315-3350, wireless receiver, code 7315-2, 7315-3

data output cable (keyboard format), code 7302-3350

data output cable (serial port format), code 7305-G60

(cable length 3m, optional cable length maximum 15m; RS232 protocol, optional RS485 protocol)

| Code | Range | Accuracy | Repeatability | A | B |
|-----------|--------------|----------|---------------|-------|------|
| 3354-25 * | 0-25mm/0-1" | 2µm | 1µm | 63mm | 25mm |
| 3354-50 * | 25-50mm/1-2" | 2µm | 1µm | 88mm | 42mm |
| 3354-75 * | 50-75mm/2-3" | 2µm | 1µm | 113mm | 56mm |

Built-in wireless

Optional accessory:


wireless receiver (keyboard format, connect up to 15 digital indicators), code 2134-R1

wireless receiver (serial port format, connect up to 15 digital indicators), code 2134-R2

| Code | Range | Accuracy | Repeatability | A | B |
|-------------|--------------|----------|---------------|-------|------|
| 3354-25WL * | 0-25mm/0-1" | 2µm | 1µm | 63mm | 25mm |
| 3354-50WL * | 25-50mm/1-2" | 2µm | 1µm | 88mm | 42mm |
| 3354-75WL * | 50-75mm/2-3" | 2µm | 1µm | 113mm | 56mm |

* Supplied with manufacturer inspection certificate

warning when over tolerance



wireless receiver 2134-R1, 2134-R2 (optional)

